
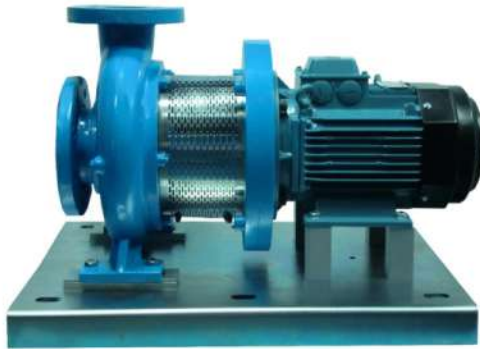


Finsbury - Close couple Pumps 160 Series - 2 Pole - 2920 RPM

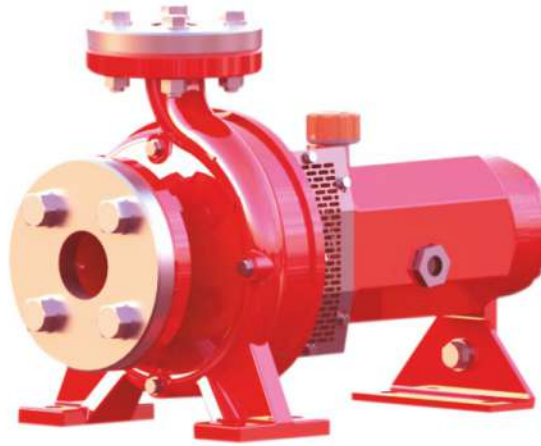

Standard

160 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-50 x 32-160-2.2/2	146	90L	2.2Kw	2950	29.0	4.0
2	FPS-50 x 32-160-3.0/2	157	100L	3.0Kw	2950	29.0	8.0
3	FPS-50 x 32-160-4.0/2	167	112M	4.0Kw	2950	35.0	8.7
4	FPS-50 x 32-160-5.5/2	177	132S	5.5Kw	2950	44.5	9.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

INDRA HYDRO TECH PUMPS PVT LTD





No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 50 x 32 - 160 - 2 Pole - Fixed Speed - 2920 RPM

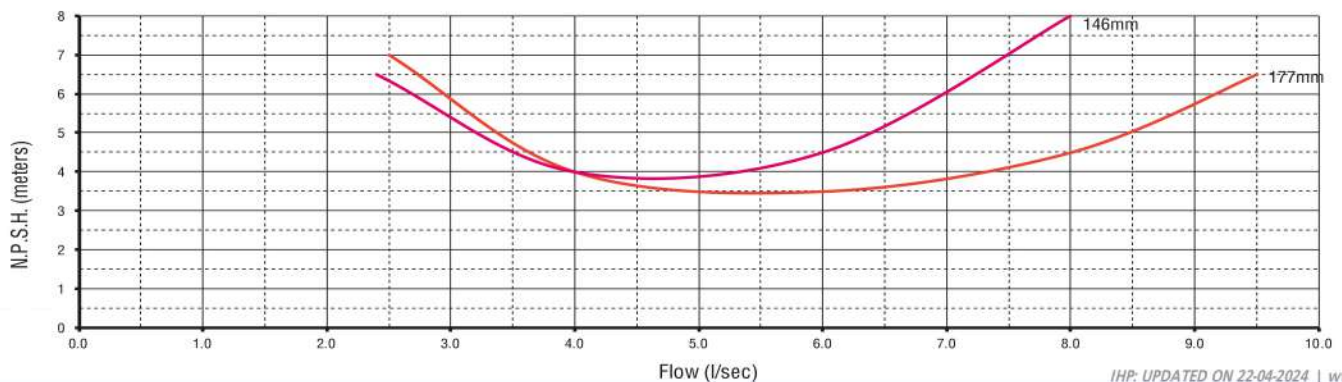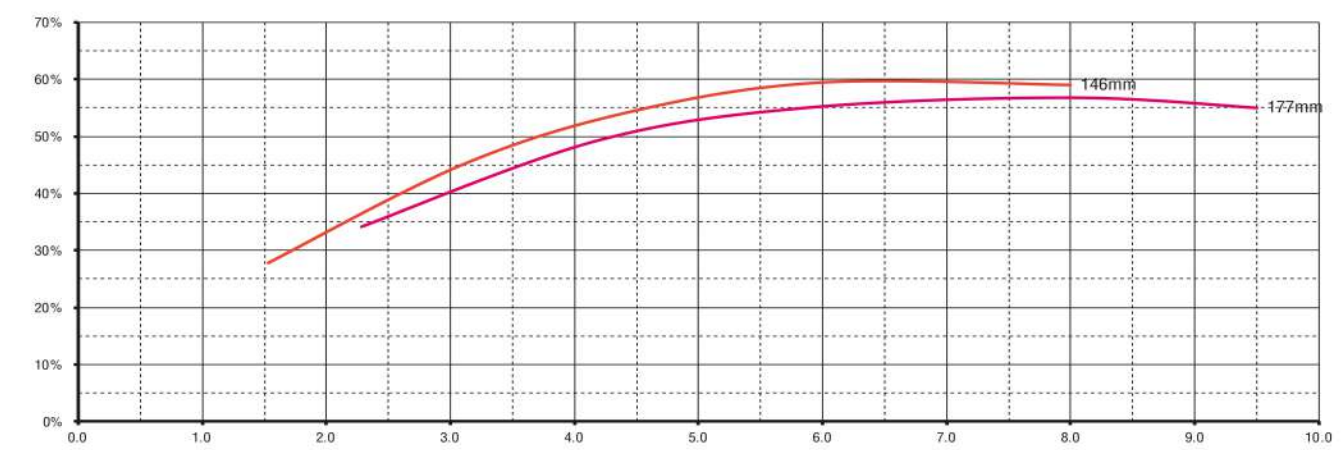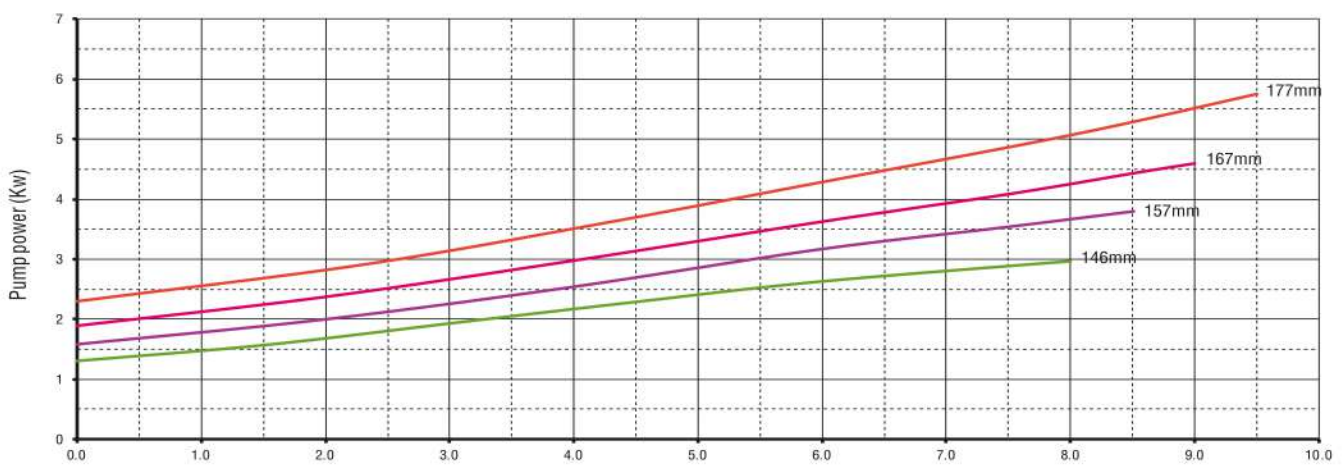
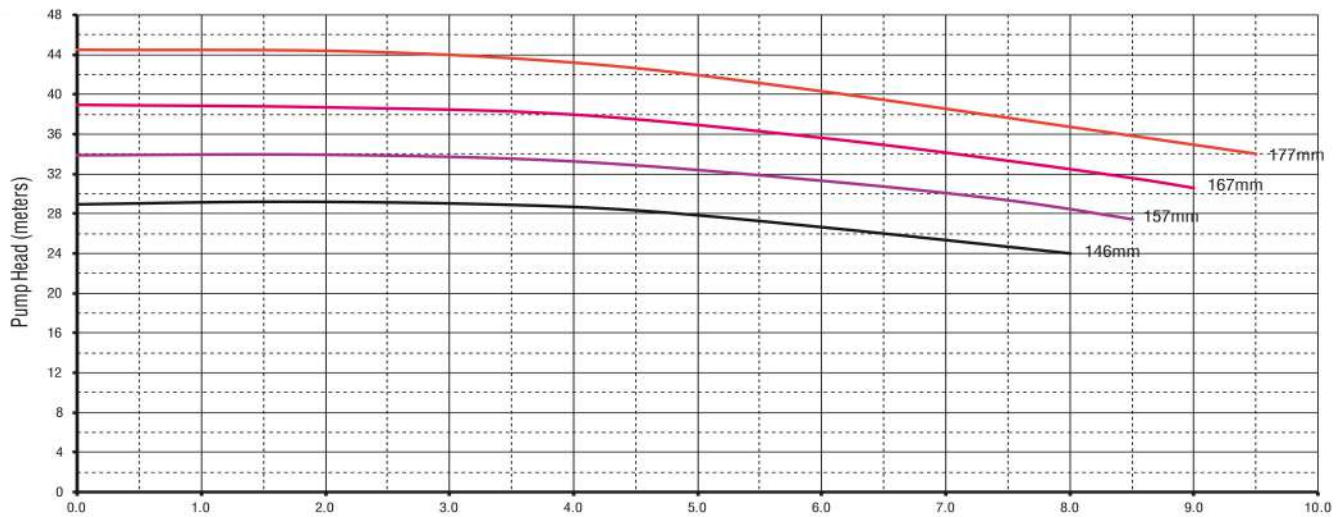


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 160 Series - 2 Pole - 2920 RPM

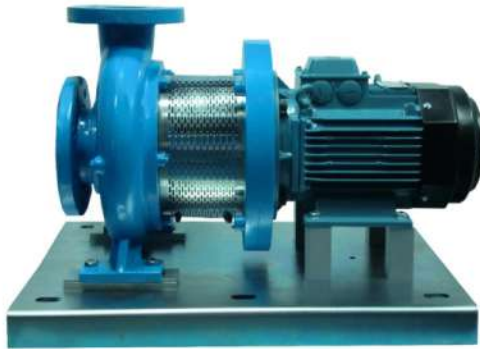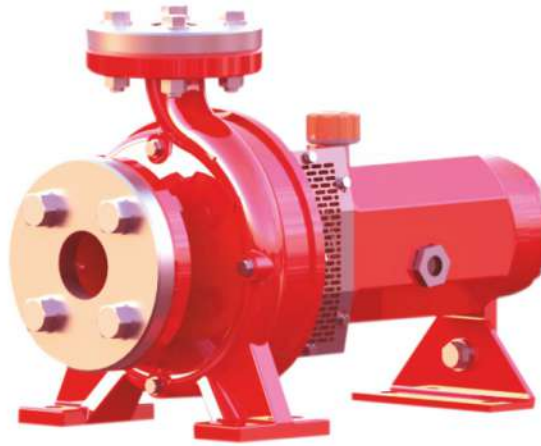

Standard





160 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-65 x 50-160-4.0/2	146	112M	4.0Kw	2950	29.0	9.0
2	FPS-65 x 50-160-5.5/2	157	132S	5.5Kw	2950	29.0	16.0
3	FPS-65 x 50-160-7.5/2	167	132S	7.5Kw	2950	39.0	17.2
4	FPS-65 x 50-160-11.0/2	177	160M	11.0Kw	2950	44.0	18.4

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 65 x 50 - 160 - 2 Pole - Fixed Speed - 2920 RPM

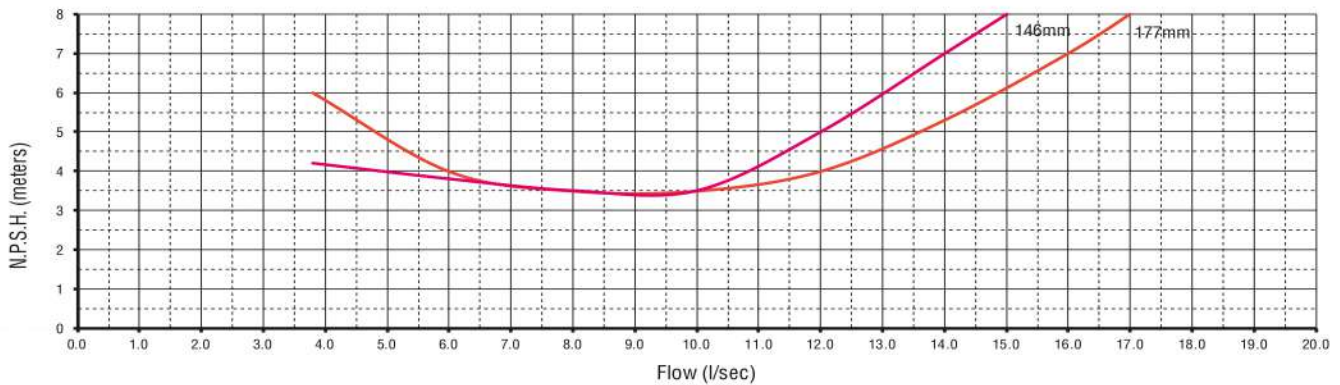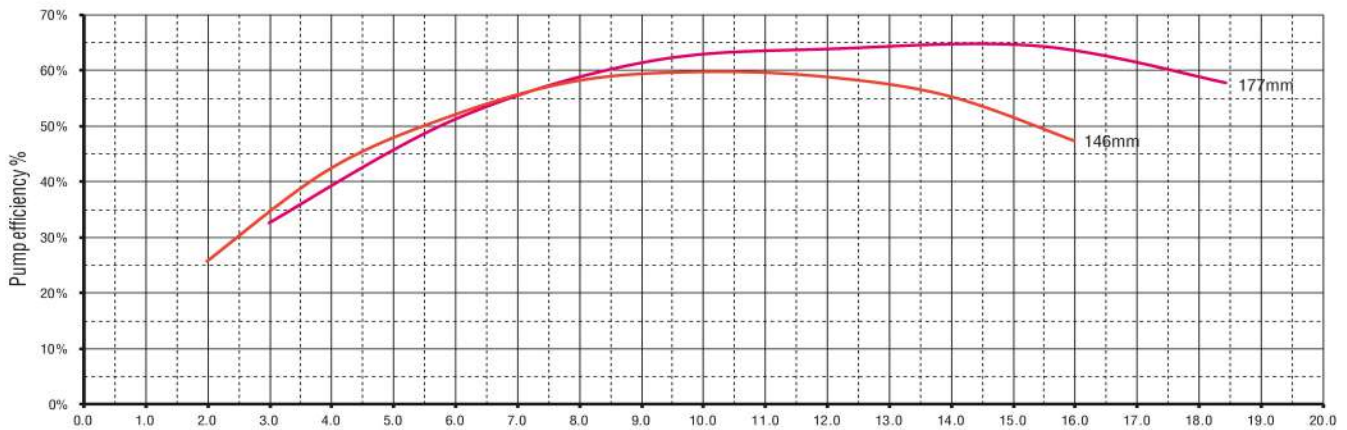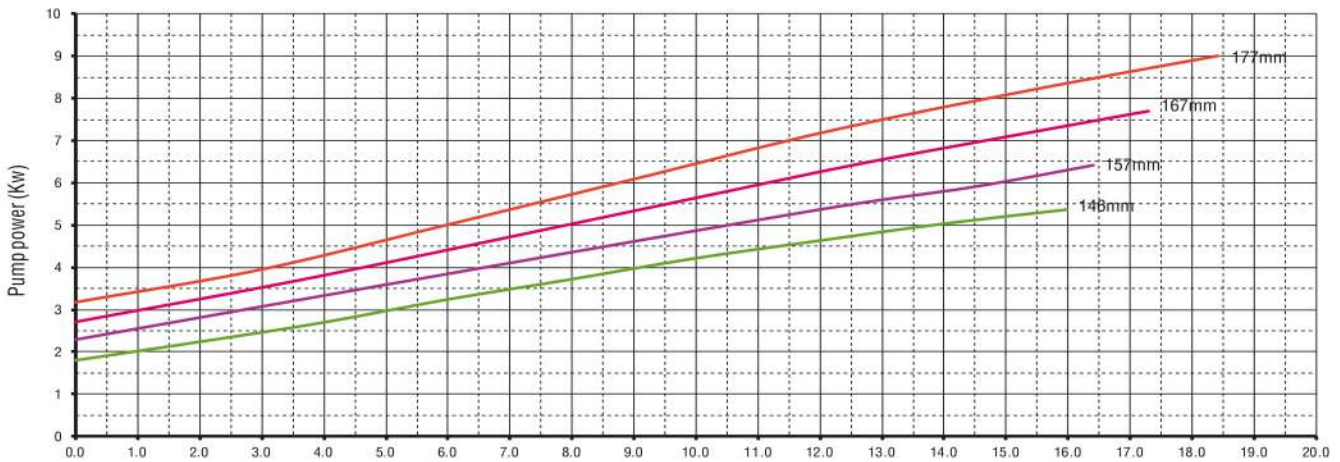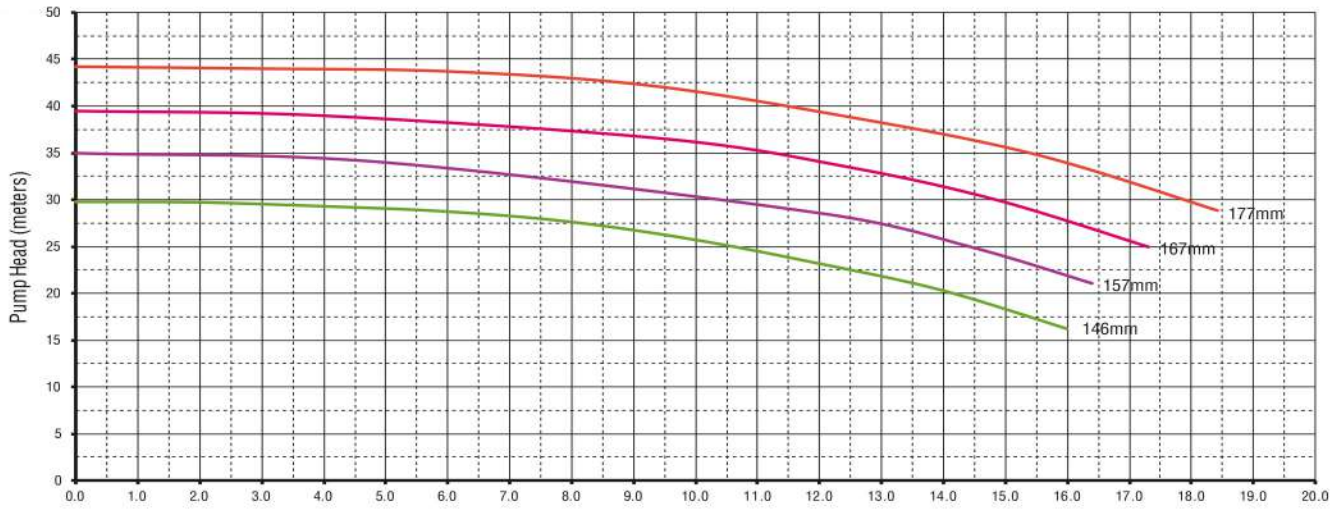

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD


No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 160 Series - 2 Pole - 2920 RPM

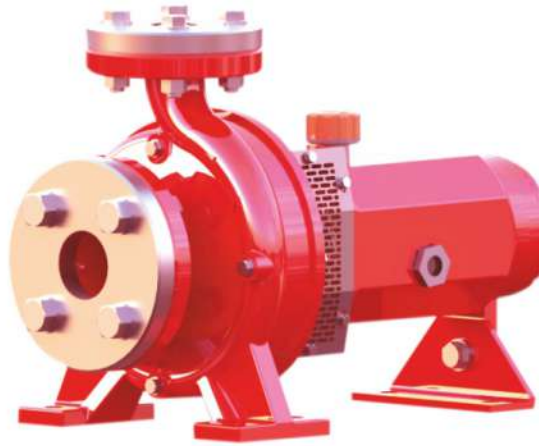

Standard





160 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-80 x 65-160-5.5/2	146	132S	5.5Kw	2950	29.8	27.5
2	FPS-80 x 65-160-7.5/2	158	132S	7.5Kw	2950	34.0	24.3
3	FPS-80 x 65-160-11.0/2	177	160M	11.0Kw	2950	44.0	27.5

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 80 x 65 - 160 - 2 Pole - Fixed Speed - 2920 RPM

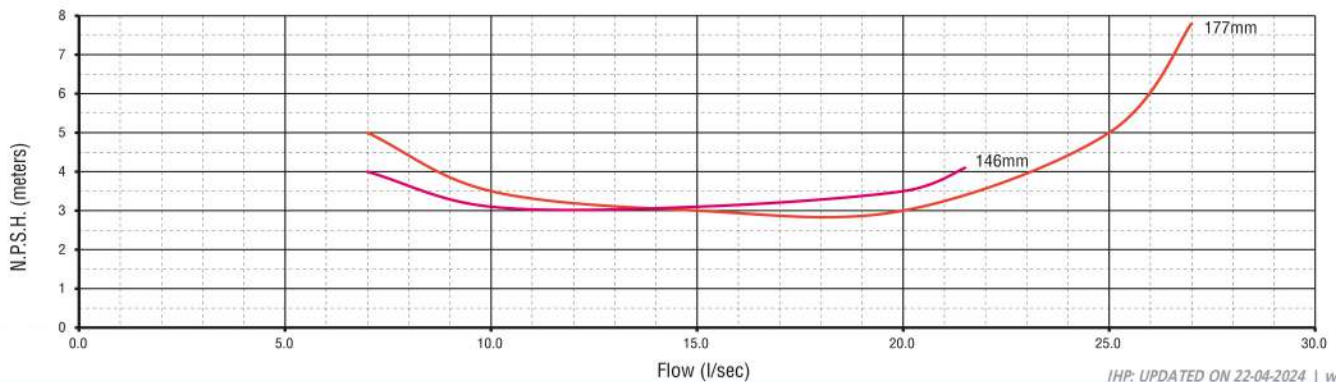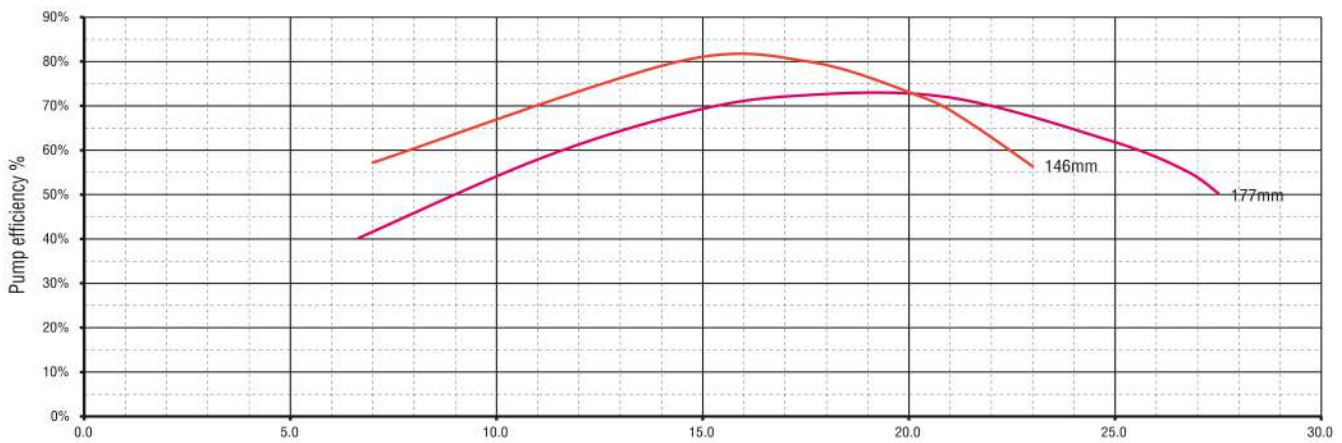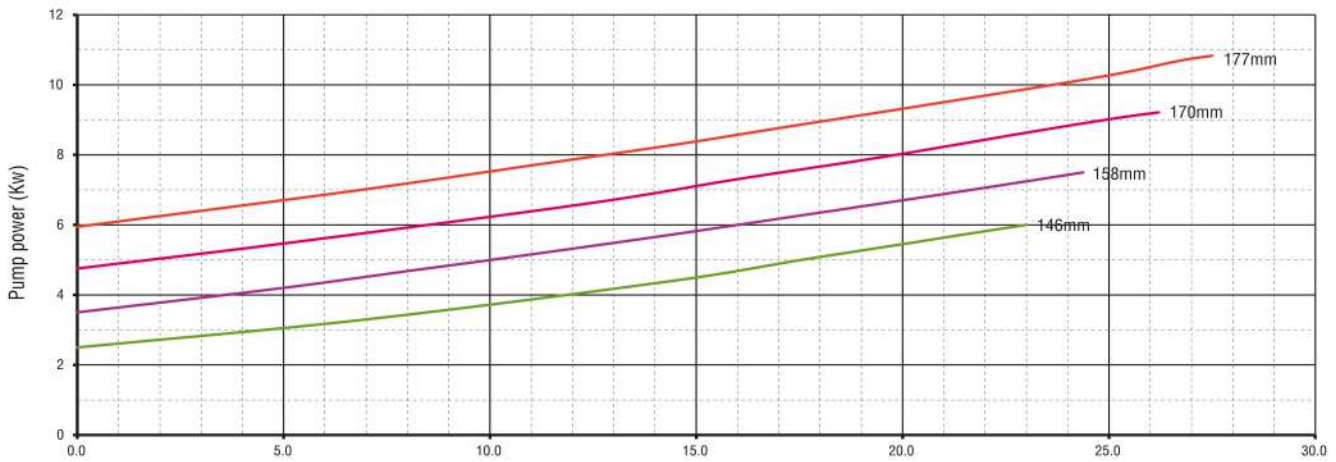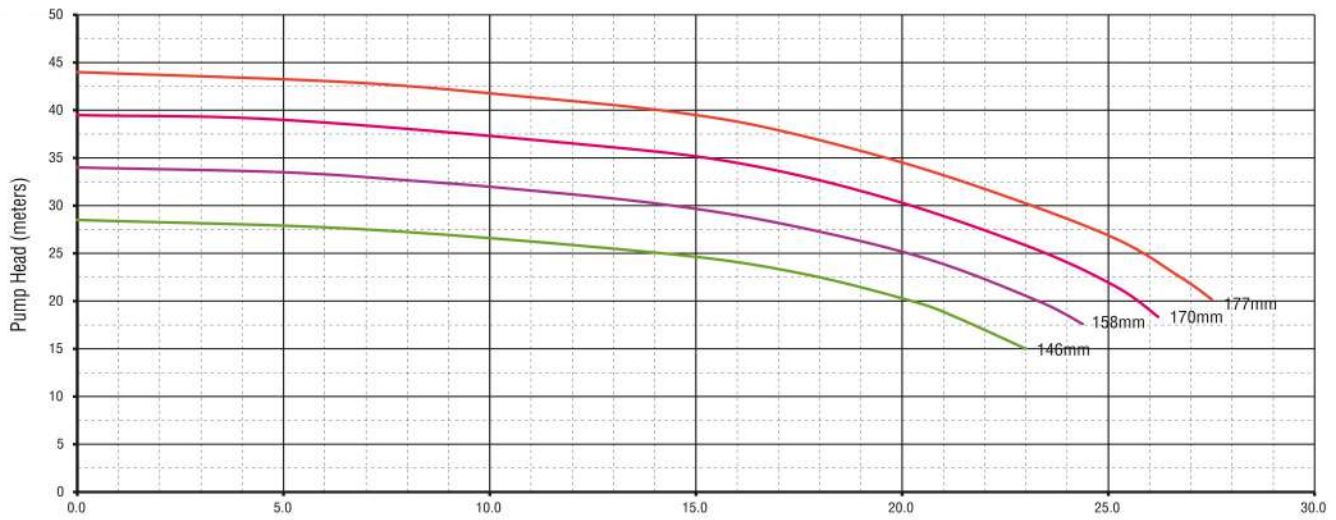

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 160 Series - 2 Pole - 2920 RPM

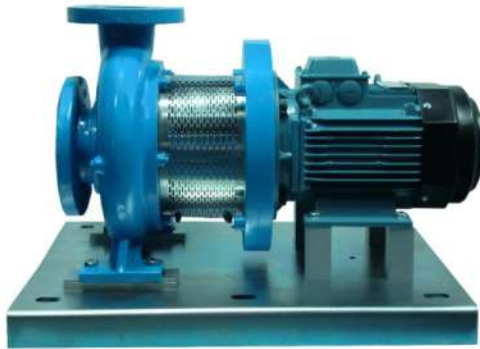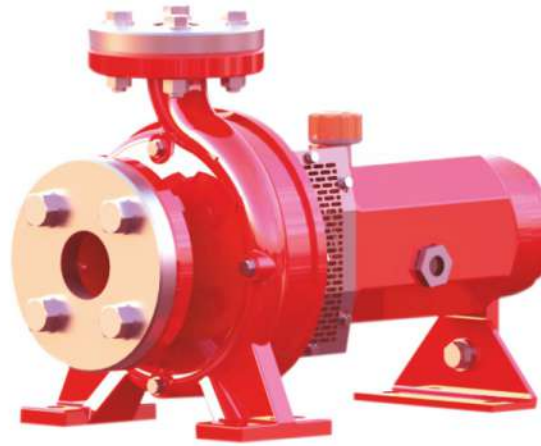

Standard





160 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858

Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-100 x 80-160-11.0/2	157	160M	11.0Kw	2950	41.0	42.0
2	FPS-100 x 80-160-15.0/2	167	160M	15.0Kw	2950	41.0	44.0
3	FPS-100 x 80-160-18.5/2	177	160L	18.5Kw	2950	41.0	45.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS 100 x 80 - 160 - 2 Pole - Fixed Speed - 2920 RPM

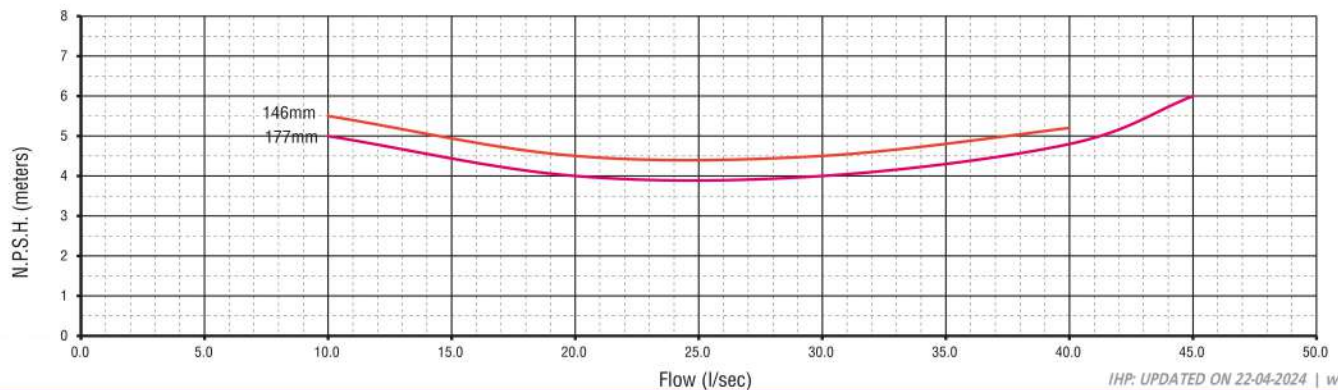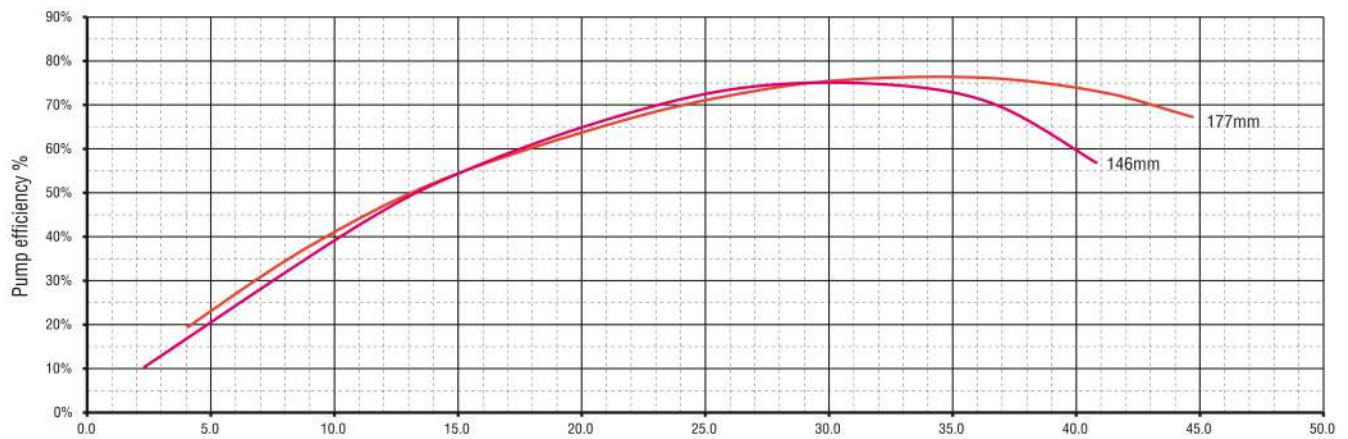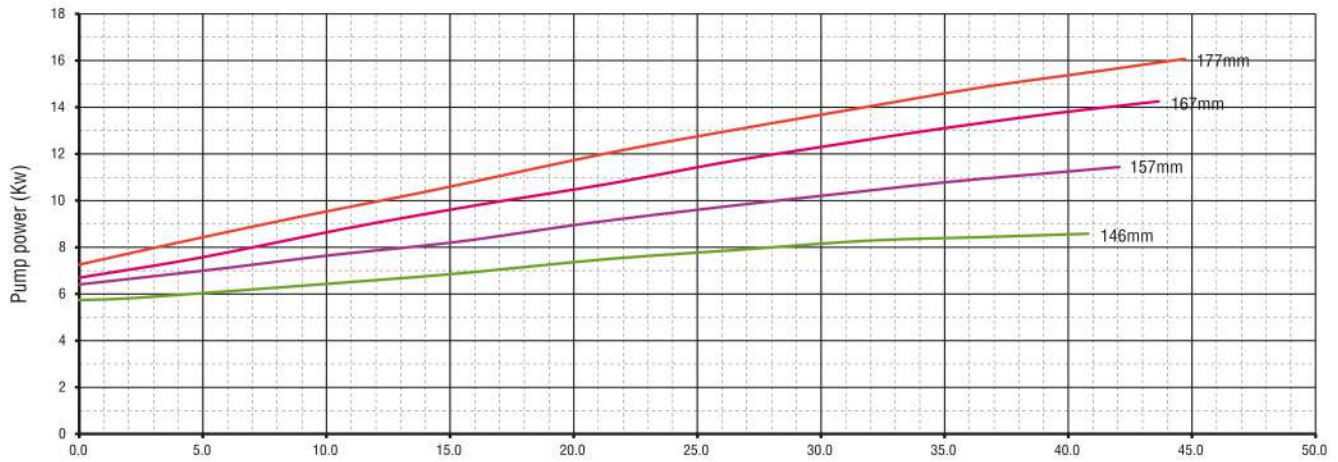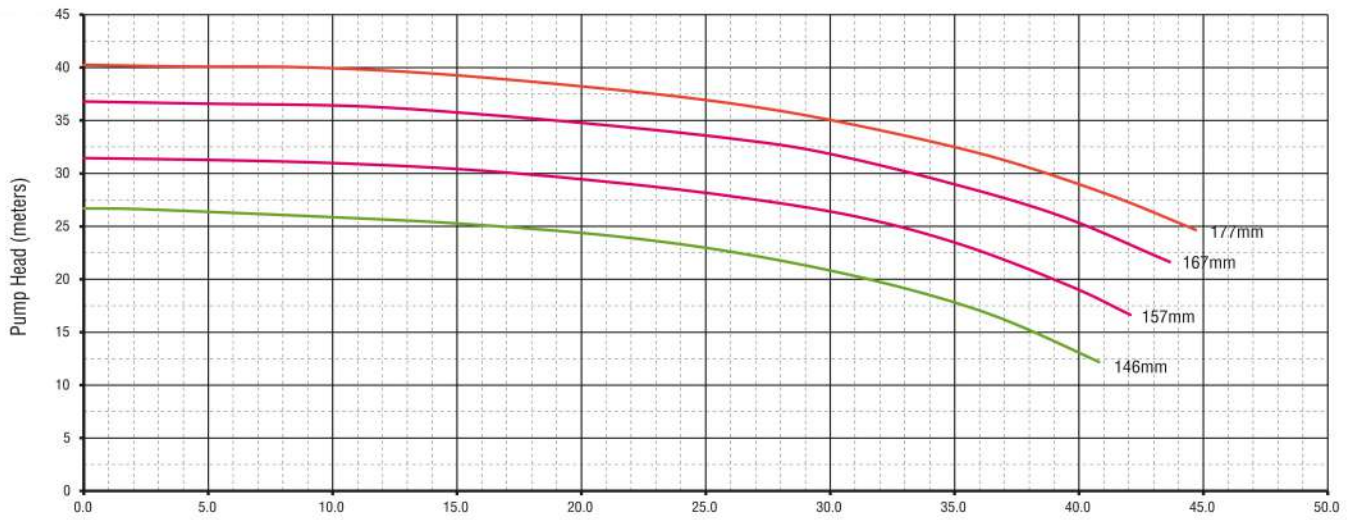

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in